


DATA SHEET

5CP PLUNGER PUMPS



Brass Models: 5CP3104, 5CP3150

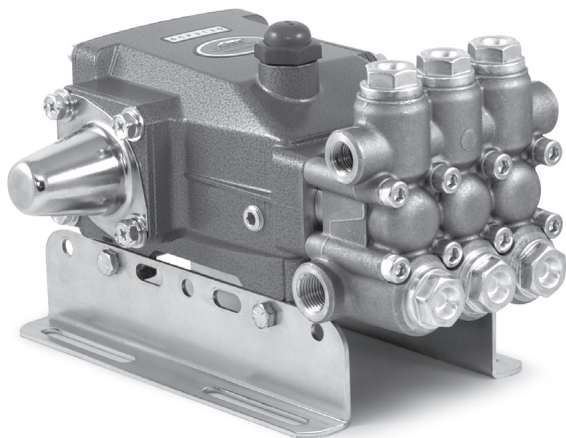

Model 5CP3120 Shown
(Shaft protector and mounting rails sold separately)

FEATURES

- Industrial triplex design offers reliability and versatility.
- Compact direct-drive mount to motor using bell housing and flexible coupling (NEMA or IEC available).
- Press-in seal cases and interchangeable valve assemblies for easy servicing.
- Standard NBR seals with alternative options for temperature and chemical compatibility.

COMMON SPECIFICATIONS

	U.S.	Metric
Inlet Pressure Range	-2.5 to 60 psi	-0.2 to 4 bar
Max. Liquid Temp. (NBR)	160° F	71° C
Alternative seals available for high temp up to 88°C (190 ° F)		
Bore	0.630"	16 mm
Crankcase Capacity	17 oz.	0.50 l
Inlet Ports (2)	1/2" NPT(F)	1/2" NPT(F)
Discharge Ports (2)	3/8" NPT(F)	3/8" NPT(F)
Shaft Diameter	0.787"	20 mm
Weight	19.9 lbs.	9 kg
Dimensions	10.90 x 10.0 x 5.79"	277 x 254 x 147 mm

SPECIFICATIONS

	U.S. Measure	Metric Measure
MODEL 5CP3104		
Flow	1.6 gpm	6 lpm
Pressure Range	100 - 3626 psi	6.9 - 250 bar
Pump RPM*	1450 rpm	1450 rpm
Stroke	0.284"	7.2 mm
MODEL 5CP3150		
Flow	4.4 gpm	16.6 lpm
Pressure Range	100 - 3626 psi	6.9 - 250 bar
Pump RPM*	1450 rpm	1450 rpm
Stroke	0.787"	20 mm

ALTERNATE SPECIFICATIONS

MODEL 5CP3104

Flow	1.9 gpm	7.2 lpm
Pressure Range	100 - 3000 psi	6.9 - 207 bar
Pump RPM*	1750 rpm	1750 rpm

MODEL 5CP3150

Flow	5.3 gpm	20 lpm
Pressure Range	100 - 3000 psi	6.9 - 207 bar
Pump RPM*	1750 rpm	1750 rpm

*Pump minimum is 100 RPM.

ALTERNATIVE SEAL CONFIGURATION

MATERIAL	SUFFIX CODE	MAXIMUM TEMPERATURE	
NBR	—	160°F	(71°C)
FPM	.0110	180°F	(82°C)
EPDM	.0220	160°F	(71°C)
HT	.3000	180°F	(82°C)
STHT	.3400	190°F	(88°C)

DETERMINING THE PUMP R.P.M.

$$\frac{\text{Rated gpm}}{\text{Rated rpm}} = \frac{\text{"Desired" gpm}}{\text{"Desired" rpm}}$$

DETERMINING THE REQUIRED H.P.

$$\frac{\text{Hp (Electric Brake)}}{1460} = \frac{\text{gpm} \times \text{psi}}{1460}$$

DETERMINING MOTOR PULLEY SIZE


$$\frac{\text{Motor Pulley O.D.}}{\text{Pump rpm}} = \frac{\text{Pump Pulley O.D.}}{\text{Motor rpm}}$$

Refer to pump **Service Manual** for repair procedure and additional technical information.

PARTS LIST

ITEM	PART NUMBER	MATL	DESCRIPTION	QTY
	5CP3104			
	5CP3150			
2	30057	STL	Key (M6x6x25)	1
5	126542	STCP R	Screw, HHC, Sems (M8x16)	8
8	46910	AL	Cover, Bearing	2
10	14028	NBR	O-Ring, Bearing Cover - 70D	2
11	43222	NBR	Seal, Oil, Crankshaft - 70D	2
15	14480	STL	Bearing, Ball	2
20	48742	TNM	Rod, Connecting Assy [10/01]	3
25	48395	FCM	Crankshaft, Dual End M7.2 - (5CP3104)	1
	48646	FCM	Crankshaft, Dual End M20 - (5CP3150)	1
32	46798	—	Cap, Oil Filler, Domed	1
33	14179	NBR	O-Ring, Oil Filler Cap - 70D	1
37	92241	PC	Gauge, Oil, Bubble w/Gasket - 80D	1
38	44428	NBR	Gasket, Flat, Oil Gauge - 80D	1
40	125824	STCP R	Screw, HHC, Sems (M6x16)	4
48	25625	STCP	Plug, Drain (1/4"x19BSP)	1
49	23170	NBR	O-Ring, Drain Plug - 70D	1
50	46940	AL	Cover, Rear	1
51	14044	NBR	O-Ring, Rear Cover	1
53	48617	AL	Crankcase	1
64	46746	CM	Pin, Crosshead	3
65	48458	BBNP	Rod, Plunger	3
70	46838	NBR	Seal, Oil, Crankcase - 70D	3
75	43900	S	Slinger, Barrier	3
88	45697	S	Washer, Keyhole (M18 x 10)	3
90	46884	CC	Plunger (M16x50)	3
98	46730	NBR	Washer, Seal - 90D	3
	48394	FPM	Washer, Seal - 90D	3
	◆ 48432	EPDM	Washer, Seal	3
99	† 48201	SS	Retainer, Plunger (M6)	3
100	46749	PVDF	Retainer, Seal	3
106	43316	NBR	Seal, LPS w/S-Spg	3
	106660	FPM	Seal, LPS w/S-Spg	3
	◆ 49134	EPDM	Seal, LPS w/S-Spg	3
	76316	ST2	Seal, LPS w/S-Spg	3
120	46888	BB	Case, Seal (Press-in-style)	3
121	13978	NBR	O-Ring, Seal Case - 70D	3
	14329	FPM	O-Ring, Seal Case	3
	◆ 48904	EPDM	O-Ring, Seal Case	3
127	43319	SNG	V-Packing	6
	46287	HT	V-Packing	6
128	46618	NY	Adapter, Male	3
139	22179	BBCP	Plug, Inlet [1/2"NPT(M)]	1
163	17547	NBR	O-Ring, Seat - 85D	6
	11685	FPM	O-Ring, Seat - 85D	6
	◆ 46648	EPDM	O-Ring, Seat - 70D	6
164	45790	S	Seat	6
166	46429	S	Valve	6
167	43750	S	Spring	6
168	† 44565	PVDF	Retainer, Spring	6
172	17549	NBR	O-Ring, Valve Plug - 70D	6
	26996	FPM	O-Ring, Valve Plug - 70D	6
	◆ 49133	EPDM	O-Ring, Valve Plug	6
173	48365	D	Back-up-Ring, Valve Plug	6
174	45900	BB	Plug, Valve	6
185	46886	FBB	Manifold, Head	1
188	126513	STCP R	Screw, HSH (M8x70)	8
196	22187	BBCP	Plug, Discharge [3/8"NPT(M)]	1
250	118672	STCP	Protector, Shaft	1
255	30243	STZP	Mount, Direct	1
260	126610	STZP R	Mount, Rail, Assy	1
265	30659	—	Kit, Complete Mounting (Incls: 30611, 30633, 118672)	1
283	34334	—	Kit, Oil Drain (3/8" x 24") (See Individual Data Sheet)	1
299	814843	FBB	Head, Complete w/NBRSeals and O-Rings	1
300	33629	NBR	Kit, Seal (Incls: 98, 106, 121, 127, 128) Standard	1
	31340	FPM*	Kit, Seal (Incls: 98, 106, 121, 127, 128) .0110	1
	◆ 31730	EPDM*	Kit, Seal (Incls: 98, 106, 121, 127, 128) .0220	1
	31665	HT	Kit, Seal (Incls: 98, 106, 121, 127, 128) .3000	1
	76556	STHT	Kit, Seal (Incls: 98, 106, 120, 121, 127, 128) .3400	1

EXPLODED VIEW

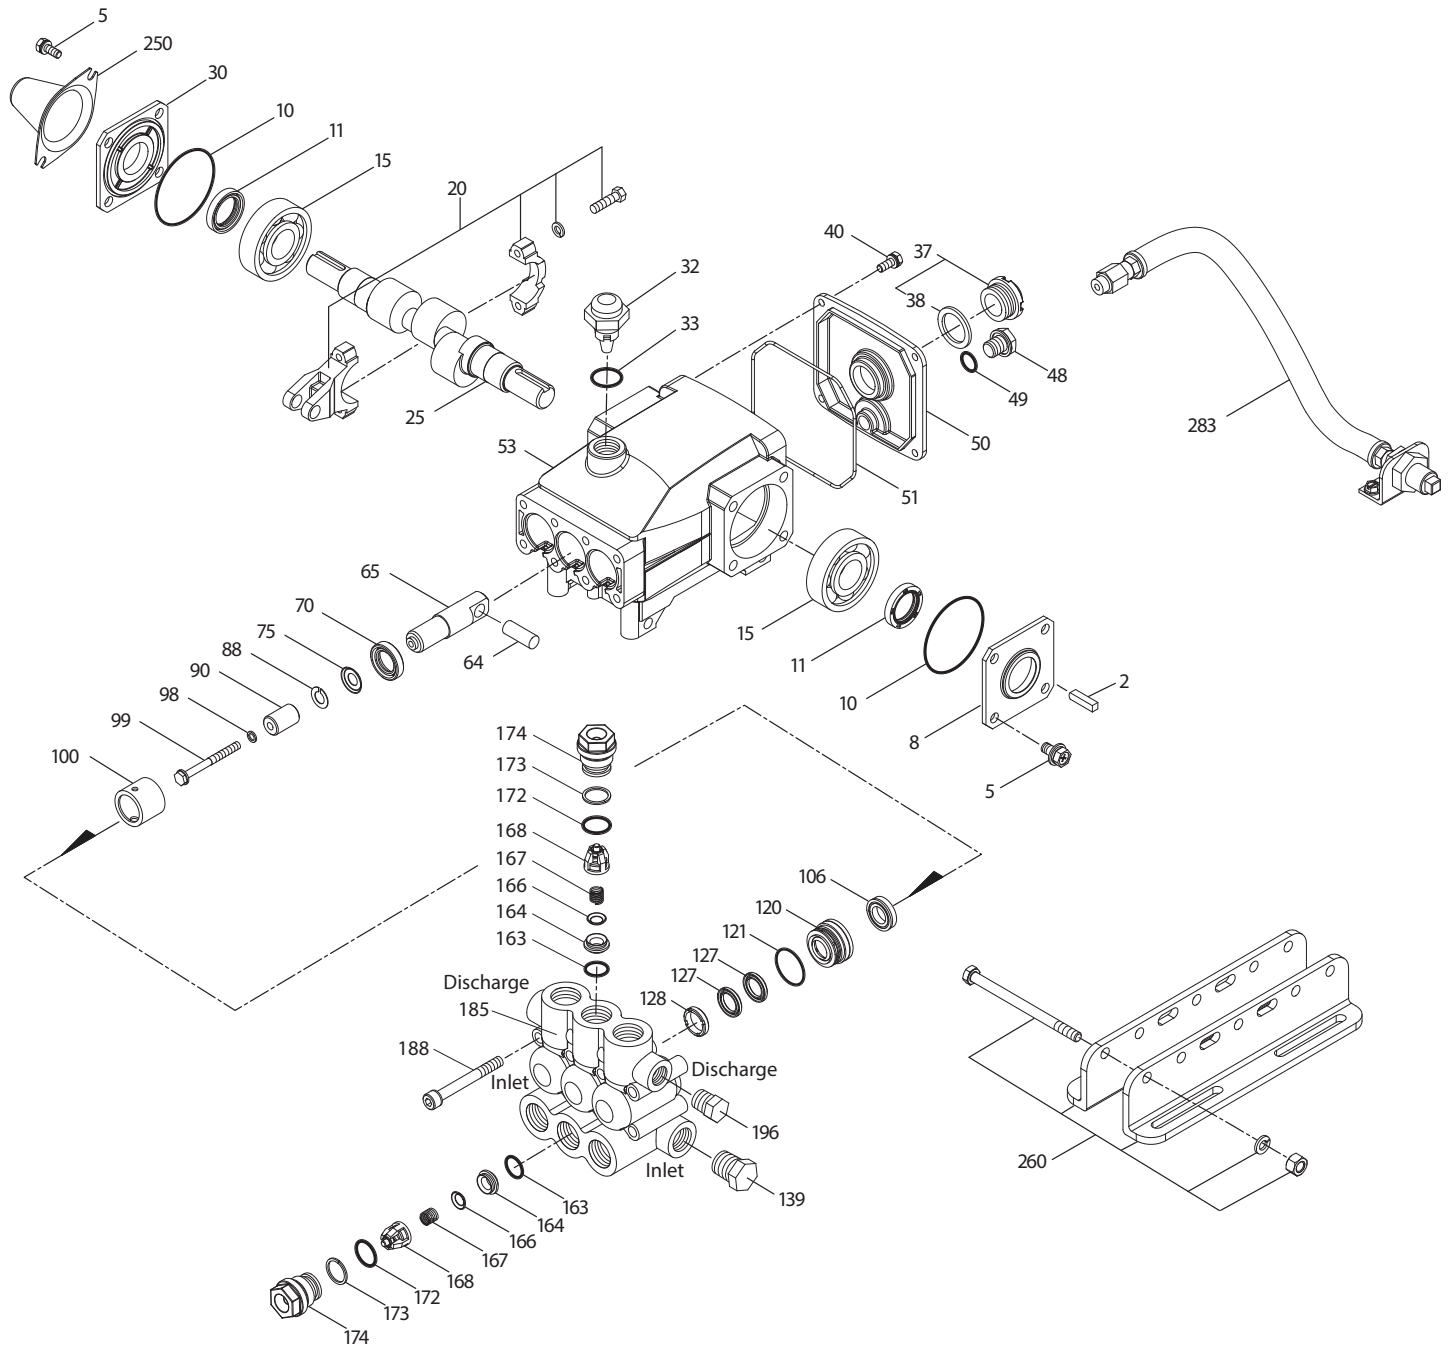

Models
Brass - 5CP3104, 5CP3150
July 2022

ITEM	PART NUMBER	MATL	DESCRIPTION	QTY
	5CP3104			
	5CP3150			
310	33060	NBR	Kit, Valve Preassembled (Incls: 163, 164, 166 - 168, 172, 173) Standard, .3000, .3400	2
	31345	FPM	Kit, Valve Preassembled (Incls: 163, 164, 166 - 168, 172, 173) .0110	2
◆	31735	EPDM	Kit, Valve Preassembled (Incls: 163, 164, 166 - 168, 172, 173) .0220	2
—	6107	—	Oil, Bottle (0,62 l / 21 oz.) ISO-68 Hydraulic (Fill to specified crankcase capacity prior to start-up)	1

Bold print part numbers are unique to a particular pump model. Italics are optional items. [] Date of latest production change.

◆ Silicone oil/grease required. † Production parts are different than repair parts. R Components comply with RoHS Directive.

*Review individual parts in each kit for material code identification.


For additional technical information see www.catpumps.com/literature/tech-bulletins.

MATERIAL CODES (Not Part of Part Number): AL=Aluminum BB=Brass BBCP=Brass/Chrome Plated BBNP=Brass/Nickel Plated CC=Ceramic CM=Chrome-moly D=Acetal

EPDM=Ethylene Propylene Diene Monomer FBB=Forged Brass FCM=Forged Chrome-moly FPM=Fluorocarbon HT=Hi-Temp (EPDM Alternative)

NBR=Medium Nitrile (Buna-N) NY=Nylon PC=Polycarbonate PVDF=Polyvinylidene Fluoride S=304SS SS=316SS SNG=Special Blend (Buna)

ST 2=Special Blend PTFE Grey STHT=Special PTFE High Temp STL=Steel STCP=Steel/Chrome Plated STZP=Steel/Zinc Plated TNM=Special High Strength

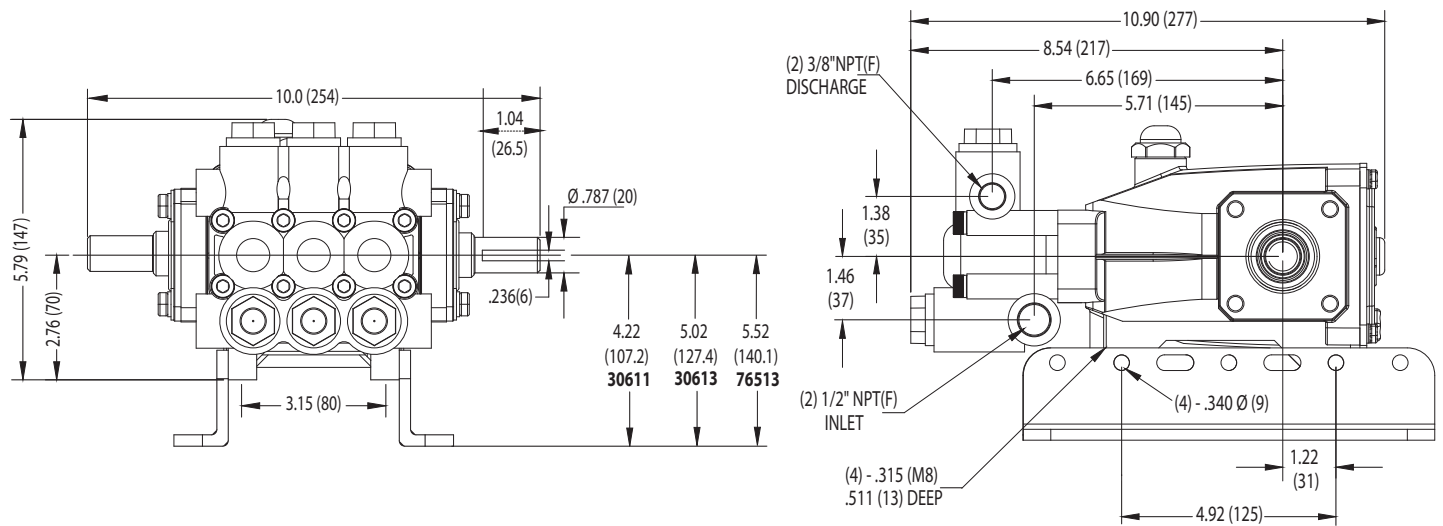

Models 5CP3104, 5CP3150

⚠ CAUTIONS AND WARNINGS

All High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices could result in personal injury or damage to pump or property. Cat Pumps does not assume any liability or responsibility for the operation of a customer's high pressure system

Read all CAUTIONS and WARNINGS before commencing service or operation of any high pressure system. The CAUTIONS and WARNINGS are included in each service manual and with each Accessory Data sheet. CAUTIONS and WARNINGS can also be viewed online at www.catpumps.de or can be requested directly from CAT PUMPS